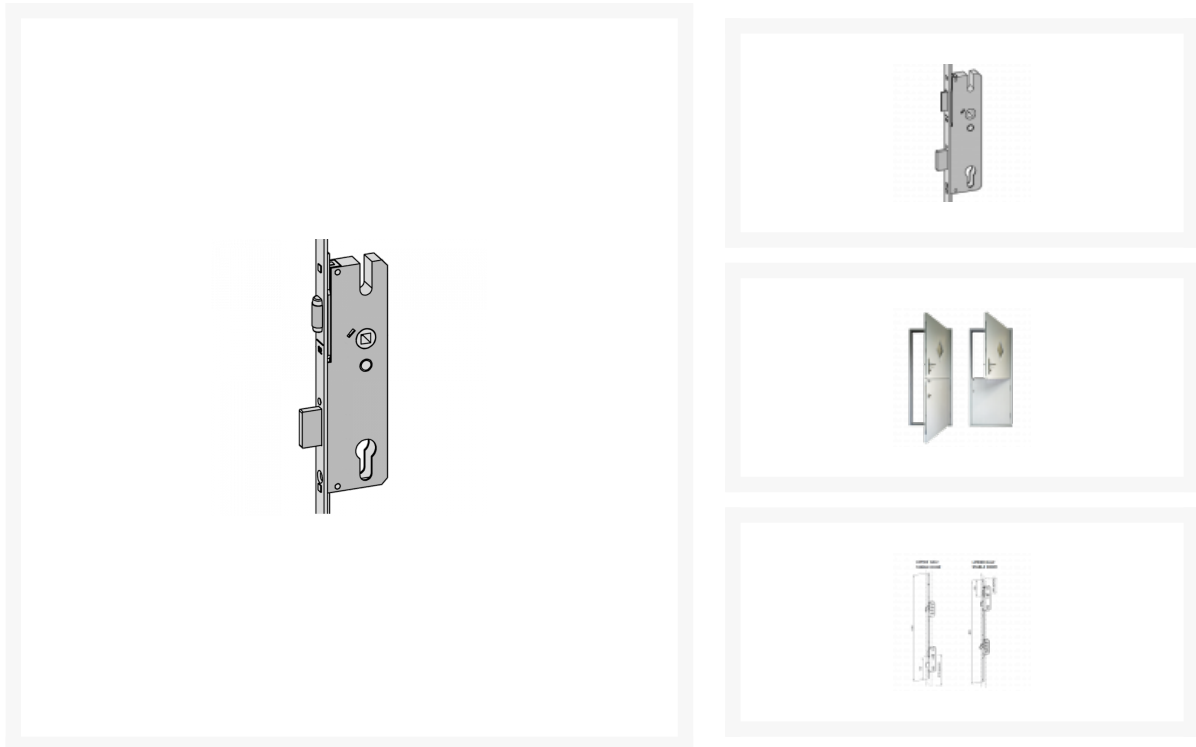




WINKHAUS Stable Door Lock



Description

The Winkhaus replacement stable door lock is available for upper or lower sections of the stable door. The lower section is hook locking with a gearbox that is key operated and has a roller bolt latch for ease of use, whilst the upper section is hook locking with a latch and deadbolt gearbox that is lever/lever operated. It is suitable for timber and composite doors and available in a choice of 45mm or 55mm backset.



45mm Backset



55mm Backset



92mm Centres






Operated By
Euro Cylinder

Features

- 45mm & 55mm backset options
- Non-handed
- Suitable for timber and composite doors
- 92mm centres
- Grade 4 corrosion resistant to BS EN1670 European Standard
- Key operated lower lock with roller latch
- Lever/Lever operated upper lock

Product Table

	L33161 45mm Lower 4966587
	L33162 45mm Upper 4966588
	L33164 55mm Lower 4966571
	L33163 55mm Upper 4966573