




EVVA ICS L111 & S363 Keyed Alike Banham Cylinders Keyed To Differ Set

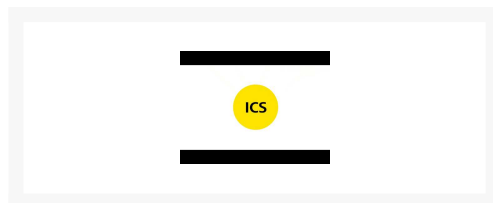

Description

This Evva ICS L111 & S363 Banham double cylinder set is supplied as a keyed alike pair but a keyed to differ set on the Aldridge in-house section and comes complete with 6 keys. ICS is a durable, patent protected reversible key system designed with maximum keying potential in mind so master key systems can be planned ahead to take into account potential extensions. The system contains a wide variety of cylinders covering virtually any application and offers both legal and technical key protection mechanisms to ensure a high degree of protection against key copying.

If you would like to register your keys once installed, then please [click here](#) to visit the EVVA Keys web site.

Optional Special Features Available

BSI - 3* Snap Resistant

Bump and snap resistant cylinders Kitemarked on the external anti snap side only with the 3*** logo.

BSZ - External Key Override

Allows operation of the cylinder from the outside even if a key is inserted on the inside.

Z - Cog Wheel Cams

Designed for use with multi-point locks or specialist mortice locks that are operated via a gear ring or a toothed rack, they can be supplied with 10, 13, 14 or 18 teeth instead of a standard cam.

SSW - All Weather Cover

Spring loaded shutter plates mounted on the outside of the cylinder open and close when the key is inserted or removed. NB - adds 5mm to cylinder length.

FL1 - Free Wheel Function

Free wheel function without forced decoupling when key is inserted (supplied in-house), for use with motorised locks.

TXT - Additional Numbering

Specific numbering or sequential numbering on keys to allow the end user to keep track of issued keys and highlight losses.

SEW - Sea Water Protections

For cylinders that are exposed to more severe environmental influences, corrosion-susceptible cylinder parts are supplied with a special surface treatment; this comes as standard for Aldridge cylinders.

NS - Nickel Silver Plug

Ideal for use on high use cylinders such as communal entrances where cylinders are used far more often.

FZG - Free Wheel Function

Certified free wheel function without forced decoupling when key is inserted (factory supplied), for use with motorised locks

FLEX - Adapted Entry

One or both sides of the cylinder can be operated via Square, Triangle, Hexagon or slot feature, e.g. one side could be opened with a key and the other by an 8mm socket.

PA - Partner Cylinder

The cylinder can only be operated when an authorised key is inserted in the opposite side.

GEF - Emergency Key Authorised

A special version of the BSZ function where only the authorised GEFE key can operate the cylinder even if a key is inserted in the other side.

ZVS - Retracted Cylinder Body

For use in special metal framed doors with integrated security roses.

ARS - Plug Pulling Protection

A special nickel silver cam connects to the plugs on both sides to protect from plug pulling attempts.

KZS - Plug Pulling Protection

Carbide components in the plug protect against plug pulling attempts.

Please [contact us](#) for more information.



Supplied With 6
Keys



Complies to BS
EN 1303



Keyed To Differ



Call For Key
Cutting Services



Call For
Workshop
Services

Features

- Supplied complete with 3 keys
- British Standard EN 1303:2005
- Wear & drill resistant
- Patented & registered system

Product Table



L34744

003EI NP KA Pair